

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT

DESCRIPTION

LED Rectangular Floodlight | Power Select | Color Select
120-277V Input | Built-in Photocell | Two Mounting Options Included
Bronze or White Finishes Available

APPLICATION

Ground, pole/tenon, or building mount applications (building façades, signs, recreational venues, general area lighting)



10 YEAR
LIMITED WARRANTY

PRODUCT FEATURES

- Keystone Power Select technology (see *Performance Specifications* for details)
- Keystone Color Select technology (3000/4000/5000K)
- LED floodlight with innovative design based on established floodlight principles
- Heavy-duty, die-cast aluminum housing
- Two interchangeable mount options included in each package
- Built-in dusk-to-dawn photocell under 3/4" knockout with anti-yellowing agent
- NEMA 7H x 7V wide floodlight distribution
- Keystone 0-10V dimming driver with 2.5kV surge protection (6kV surge protection on 100W fixture)
- Ambient operating temperature: -40°C/-40°F to 50°C/122°F
- UL Certified for wet locations; IP65 rated
- Power factor: > 0.95
- THD: < 20%
- LED chip lifetime: L70 > 100,000 hrs @ 25°C/77°F ambient fixture temperature
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions

**** TAA options available. See *Ordering Information* below**

PERFORMANCE SPECIFICATIONS OVERVIEW

Catalog Number	Preset Wattage	Preset CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Housing Color	Lifetime
KT-FLED15PS-R4A-UNV-8CSB-VDIM KT-FLED15PS-R4A-UNV-8CSB-VDIM-W	15W	5000K	2,100	140 lm/W	120-277V	0-10V	>80	Bronze or white finishes available	50,000hrs
KT-FLED35PS-R4A-UNV-8CSB-VDIM KT-FLED35PS-R4A-UNV-8CSB-VDIM-W	35W		4,900	140 lm/W					
KT-FLED60PS-R4A-UNV-8CSB-VDIM KT-FLED60PS-R4A-UNV-8CSB-VDIM-W	60W		8,400	140 lm/W					
KT-FLED75PS-R4A-UNV-8CSB-VDIM KT-FLED75PS-R4A-UNV-8CSB-VDIM-W	75W		10,500	140 lm/W					
KT-FLED100PS-R4A-UNV-8CSB-VDIM KT-FLED100PS-R4A-UNV-8CSB-VDIM-W	100W		14,000	140 lm/W					

* Color Select: Preset to (5000K)

* Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017.

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT


PERFORMANCE SPECIFICATIONS DETAILED

Catalog Number	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	CRI
KT-FLED15PS-R4A-UNV-8CSB-VDIM KT-FLED15PS-R4A-UNV-8CSB-VDIM-W	15W	3000K	1,995	133 lm/W	120-277V	0-10V	>80
		4000K	2,250	150 lm/W			
		5000K	2,100	140 lm/W			
	12W	3000K	1,584	132 lm/W			
		4000K	1,836	153 lm/W			
		5000K	1,716	143 lm/W			
	9W	3000K	1,242	138 lm/W			
		4000K	1,404	156 lm/W			
		5000K	1,332	148 lm/W			
KT-FLED35PS-R4A-UNV-8CSB-VDIM KT-FLED35PS-R4A-UNV-8CSB-VDIM-W	35W	3000K	4,655	133 lm/W	120-277V	0-10V	>80
		4000K	5,250	150 lm/W			
		5000K	4,900	140 lm/W			
	25W	3000K	3,375	135 lm/W			
		4000K	3,875	155 lm/W			
		5000K	3,625	145 lm/W			
	15W	3000K	2,100	140 lm/W			
		4000K	2,400	160 lm/W			
		5000K	2,250	150 lm/W			
KT-FLED60PS-R4A-UNV-8CSB-VDIM KT-FLED60PS-R4A-UNV-8CSB-VDIM-W	60W	3000K	7,980	133 lm/W	120-277V	0-10V	>80
		4000K	9,000	150 lm/W			
		5000K	8,400	140 lm/W			
	50W	3000K	6,650	133 lm/W			
		4000K	7,750	155 lm/W			
		5000K	7,250	145 lm/W			
	40W	3000K	5,600	140 lm/W			
		4000K	6,400	160 lm/W			
		5000K	6,000	150 lm/W			
KT-FLED75PS-R4A-UNV-8CSB-VDIM KT-FLED75PS-R4A-UNV-8CSB-VDIM-W	75W	3000K	9,975	133 lm/W	120-277V	0-10V	>80
		4000K	11,250	150 lm/W			
		5000K	10,500	140 lm/W			
	60W	3000K	8,280	138 lm/W			
		4000K	9,480	158 lm/W			
		5000K	8,880	148 lm/W			
	45W	3000K	6,390	142 lm/W			
		4000K	7,290	162 lm/W			
		5000K	6,840	152 lm/W			
KT-FLED100PS-R4A-UNV-8CSB-VDIM KT-FLED100PS-R4A-UNV-8CSB-VDIM-W	100W	3000K	13,300	133 lm/W	120-277V	0-10V	>80
		4000K	15,000	150 lm/W			
		5000K	14,000	140 lm/W			
	90W	3000K	12,150	135 lm/W			
		4000K	13,950	155 lm/W			
		5000K	13,050	145 lm/W			
	80W	3000K	11,200	140 lm/W			
		4000K	12,800	160 lm/W			
		5000K	12,000	150 lm/W			

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT

GENERAL WIRING DIAGRAM

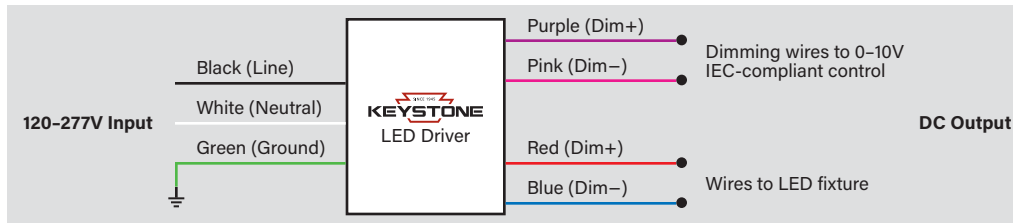

POWER SELECT (WATTAGE) AND COLOR SELECT (CCT), AND PHOTOCELL ADJUSTMENT

- This fixture is equipped with field-adjustable selectable wattage, selectable CCT, and photocell adjustment technology.
- 1. Ensure power is off to the fixture.
- 2. Unscrew the gasketed caps from the top and bottom sides of the fixture as shown in the images below.
- 3. Adjust dip switches to desired settings. *Note: all fixtures are factory preset to highest wattage, 5000K, and photocell enabled.*
- 4. Screw on gasketed caps.
- 5. Restore power to fixture.





Power Select switch for KT-FLED100PS-R4A-UNV-8CSB-VDIM shown. For reference only. Different SKUs will show different wattages.



KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT



PHOTOMETRIC SPECIFICATIONS (KT-FLED15PS-R4A-UNV-8CSB-VDIM & KT-FLED15PS-R4A-UNV-8CSB-VDIM-W)

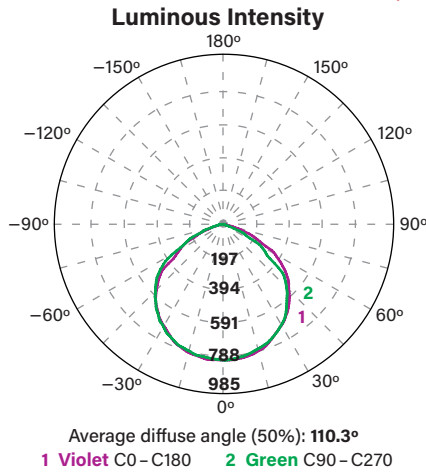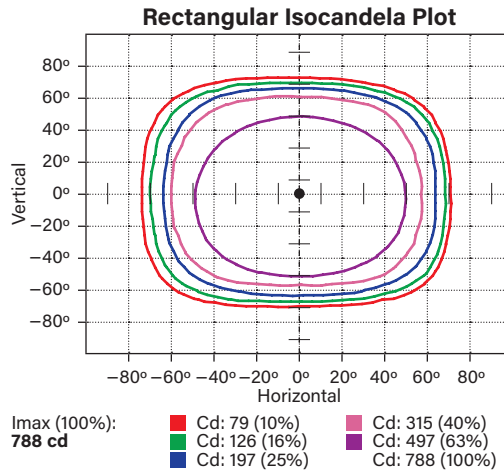

Flux Distribution

Zone	Lumens	% Luminaire
Forward Light	101.3 lm	49.0%
0°-30°	308 lm	14.9%
30°-60°	578 lm	28.0%
60°-80°	124 lm	6.0%
80°-90°	2 lm	0.1%
Back Light	1,055 lm	51.0%
0°-30°	308 lm	14.9%
30°-60°	594 lm	28.7%
60°-80°	149 lm	7.2%
80°-90°	3 lm	0.2%
Up Light	0 lm	0.0%
90°-100°	0 lm	0.0%
100°-180°	0 lm	0.08%
Trapped Light	N/A	N/A



PHOTOMETRIC SPECIFICATIONS (KT-FLED35PS-R4A-UNV-8CSB-VDIM & KT-FLED35PS-R4A-UNV-8CSB-VDIM-W)

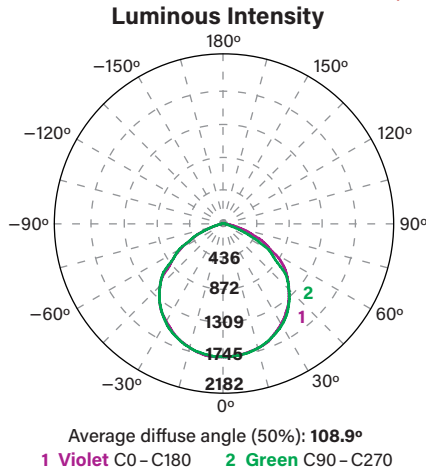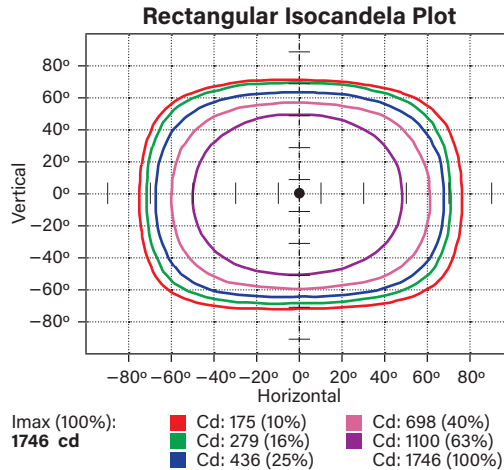

Flux Distribution

Zone	Lumens	% Luminaire
Forward Light	2,315 lm	50.3%
0°-30°	688 lm	15.0%
30°-60°	1,314 lm	28.6%
60°-80°	309 lm	6.7%
80°-90°	4 lm	0.1%
Back Light	2,284 lm	49.7%
0°-30°	681 lm	14.8%
30°-60°	1,282 lm	27.9%
60°-80°	315 lm	6.8%
80°-90°	7 lm	0.1%
Up Light	0 lm	0.0%
90°-100°	0 lm	0.0%
100°-180°	0 lm	0.0%
Trapped Light	N/A	N/A

PHOTOMETRIC SPECIFICATIONS (KT-FLED60PS-R4A-UNV-8CSB-VDIM & KT-FLED60PS-R4A-UNV-8CSB-VDIM-W)

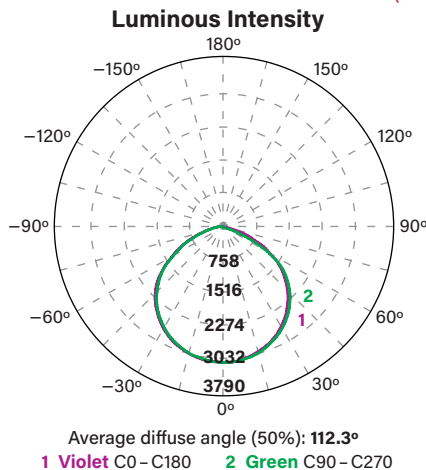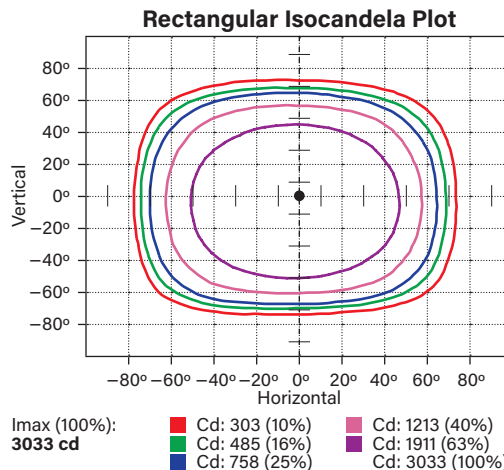



Flux Distribution

Zone	Lumens	% Luminaire
Forward Light	4,202 lm	51.7%
0°-30°	1,202 lm	14.8%
30°-60°	2,368 lm	29.1%
60°-80°	626 lm	7.7%
80°-90°	7 lm	0.1%
Back Light	3,931 lm	48.3%
0°-30°	1,170 lm	14.4%
30°-60°	2,189 lm	26.9%
60°-80°	561 lm	6.9%
80°-90°	10 lm	0.1%
Up Light	0 lm	0.0%
90°-100°	0 lm	0.0%
100°-180°	0 lm	0.0%
Trapped Light	N/A	N/A

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT



PHOTOMETRIC SPECIFICATIONS (KT-FLED75PS-R4A-UNV-8CSB-VDIM & KT-FLED75PS-R4A-UNV-8CSB-VDIM-W)

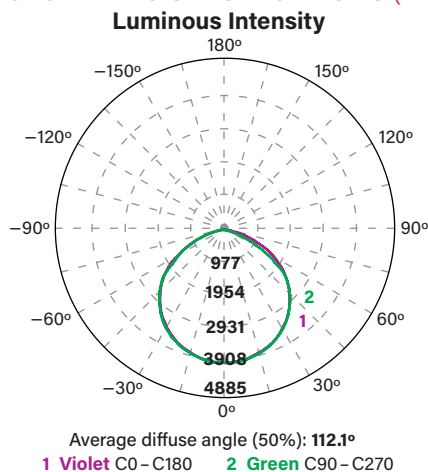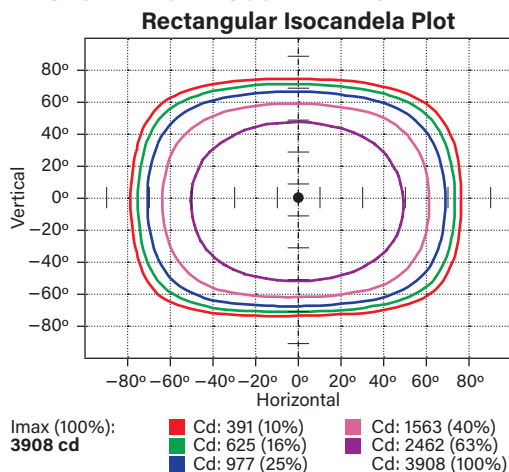

Flux Distribution

Zone	Lumens	% Luminaire
Forward Light	5,298 lm	51.7%
0°-30°	1,538 lm	14.3%
30°-60°	2,985 lm	28.5%
60°-80°	763 lm	8.7%
80°-90°	11 lm	0.2%
Back Light	5,297 lm	47.5%
0°-30°	1,523 lm	14.0%
30°-60°	2,910 lm	26.6%
60°-80°	841 lm	6.7%
80°-90°	24 lm	0.1%
Up Light	0 lm	0.0%
90°-100°	0 lm	0.0%
100°-180°	0 lm	0.0%
Trapped Light	N/A	N/A

PHOTOMETRIC SPECIFICATIONS (KT-FLED100PS-R4A-UNV-8CSB-VDIM & KT-FLED100PS-R4A-UNV-8CSB-VDIM-W)

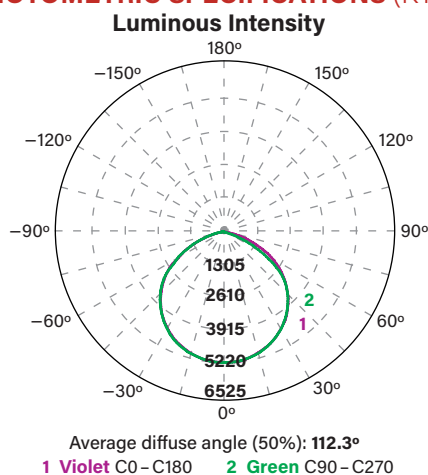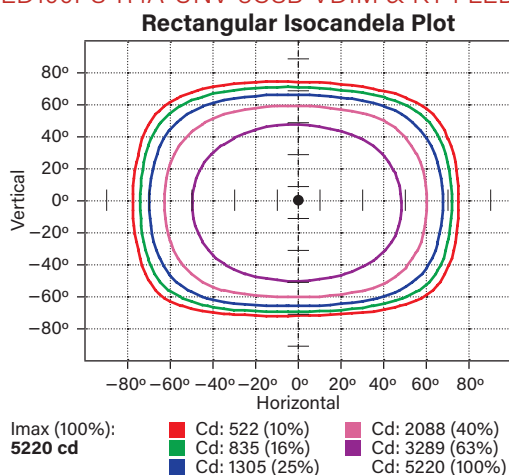

Flux Distribution

Zone	Lumens	% Luminaire
Forward Light	7,043 lm	49.8%
0°-30°	2,057 lm	14.5%
30°-60°	3,969 lm	28.1%
60°-80°	1,001 lm	7.1%
80°-90°	17 lm	0.1%
Back Light	7,097 lm	50.2%
0°-30°	2,038 lm	14.4%
30°-60°	3,896 lm	27.6%
60°-80°	1,128 lm	8.0%
80°-90°	34 lm	0.2%
Up Light	0 lm	0.0%
90°-100°	0 lm	0.0%
100°-180°	0 lm	0.0%
Trapped Light	N/A	N/A

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X




GENERAL PURPOSE FLOODLIGHT

LIGHT DISTRIBUTION PATTERNS: Isometric View from Above

KT-FLED15PS-R4A-UNV-8CSB-VDIM | KT-FLED15PS-R4A-UNV-8CSB-VDIM-W

Building exterior mounted at 10' | Aimed 30° below horizontal




Ground mounted 6" above ground, 10' from building | Aimed 10° above horizontal

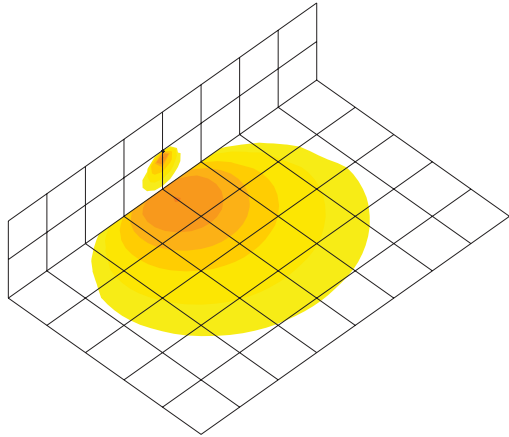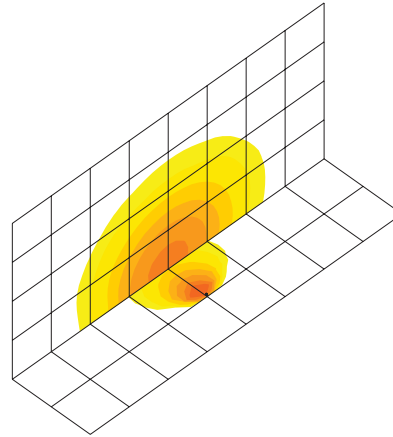

KT-FLED35PS-R4A-UNV-8CSB-VDIM | KT-FLED35PS-R4A-UNV-8CSB-VDIM-W

Building exterior mounted at 15' | Aimed 30° below horizontal




Ground mounted 6" above ground, 15' from building | Aimed 10° above horizontal

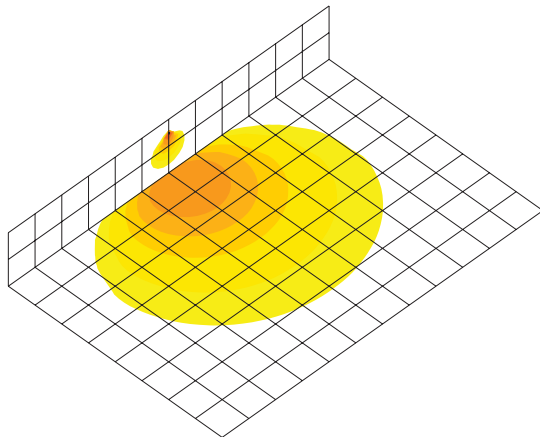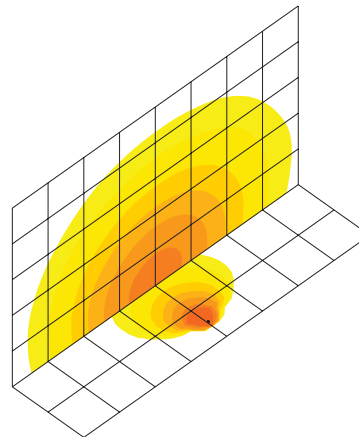

KT-FLED60PS-R4A-UNV-8CSB-VDIM | KT-FLED60PS-R4A-UNV-8CSB-VDIM-W

Building exterior mounted at 15' | Aimed 30° below horizontal

Ground mounted 6" above ground, 20' from building | Aimed 10° above horizontal

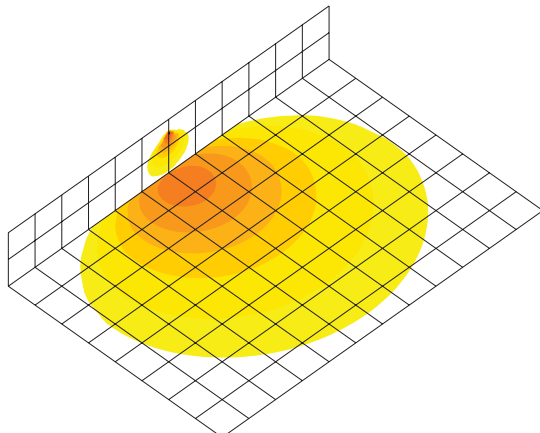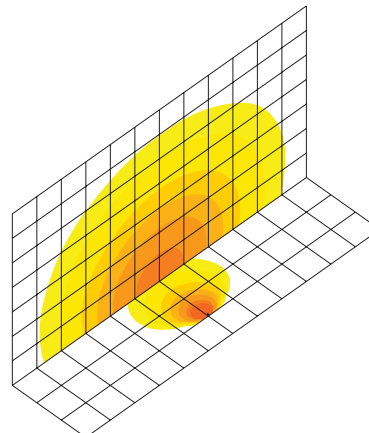

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X




GENERAL PURPOSE FLOODLIGHT

LIGHT DISTRIBUTION PATTERNS: Isometric View from Above *(continued)*

KT-FLED75PS-R4A-UNV-8CSB-VDIM | KT-FLED75PS-R4A-UNV-8CSB-VDIM-W

Building exterior mounted at 20' | Aimed 30° below horizontal




Ground mounted 6" above ground, 25' from building | Aimed 10° above horizontal

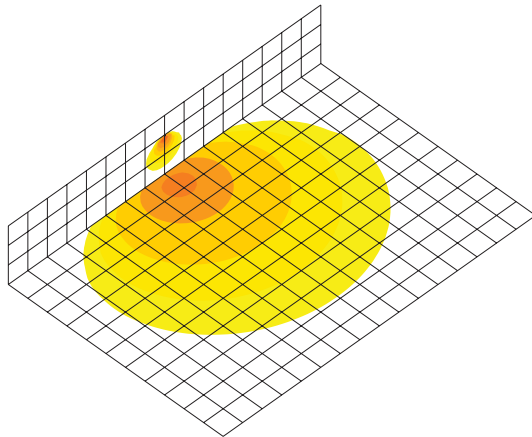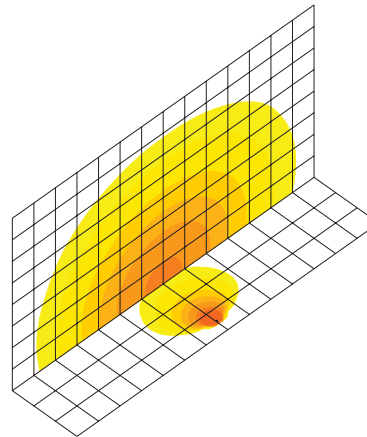

KT-FLED100PS-R4A-UNV-8CSB-VDIM | KT-FLED100PS-R4A-UNV-8CSB-VDIM-W

Building exterior mounted at 20' | Aimed 30° below horizontal

Ground mounted 6" above ground, 30' from building | Aimed 10° above horizontal

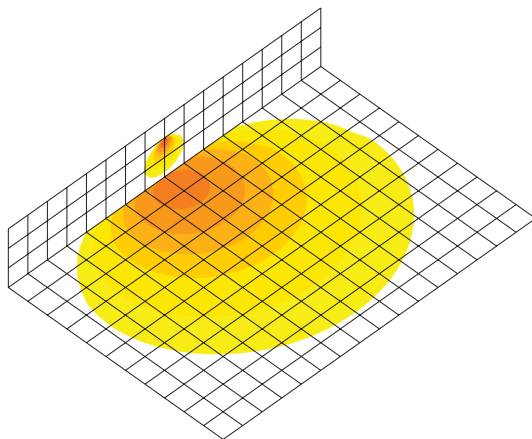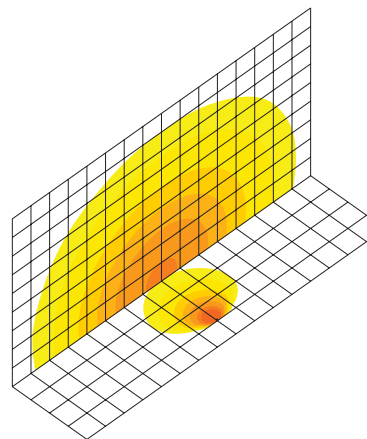


KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT

PHYSICAL SPECIFICATIONS

KNUCKLE MOUNT

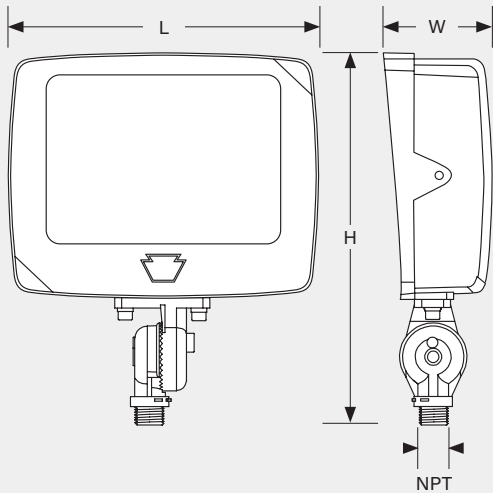

KT-FLED15PS-R4A-UNV-8CSB-VDIM KT-FLED15PS-R4A-UNV-8CSB-VDIM-W	
L (Length)	6.48"
H (Height)	8.43"
W (Width)	2.40"
NPT	0.5"


KT-FLED35PS-R4A-UNV-8CSB-VDIM KT-FLED35PS-R4A-UNV-8CSB-VDIM-W	
L (Length)	7.39"
H (Height)	8.70"
W (Width)	2.51"
NPT	0.5"

KT-FLED60PS-R4A-UNV-8CSB-VDIM KT-FLED60PS-R4A-UNV-8CSB-VDIM-W	
L (Length)	8.72"
H (Height)	10.31"
W (Width)	3.04"
NPT	0.5"

WEIGHT

Catalog Number	Fixture Weight	Carton Weight
KT-FLED15PS-R4A-UNV-8CSB-VDIM KT-FLED15PS-R4A-UNV-8CSB-VDIM-W	2.25 lbs	2.89 lbs
KT-FLED35PS-R4A-UNV-8CSB-VDIM KT-FLED35PS-R4A-UNV-8CSB-VDIM-W	2.49 lbs	3.26 lbs
KT-FLED60PS-R4A-UNV-8CSB-VDIM KT-FLED60PS-R4A-UNV-8CSB-VDIM-W	3.52 lbs	4.31 lbs

YOKE MOUNT

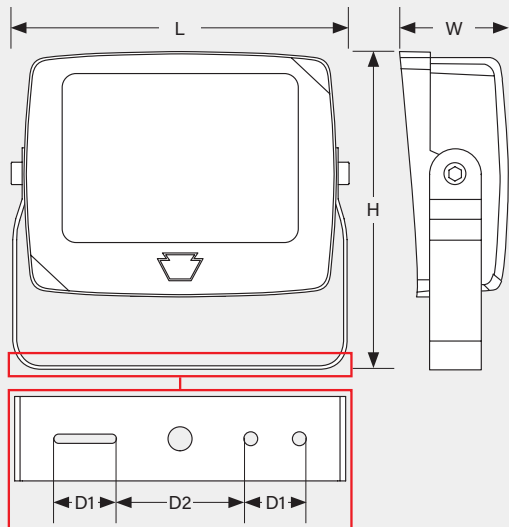

KT-FLED15PS-R4A-UNV-8CSB-VDIM KT-FLED15PS-R4A-UNV-8CSB-VDIM-W	
L (Length)	7.41"
H (Height)	6.10"
W (Width)	2.40"
D1 (Distance 1)	1.10"
D2 (Distance 2)	2.21"

KT-FLED35PS-R4A-UNV-8CSB-VDIM KT-FLED35PS-R4A-UNV-8CSB-VDIM-W	
L (Length)	8.33"
H (Height)	7.02"
W (Width)	2.51"
D1 (Distance 1)	1.10"
D2 (Distance 2)	2.21"

KT-FLED60PS-R4A-UNV-8CSB-VDIM KT-FLED60PS-R4A-UNV-8CSB-VDIM-W	
L (Length)	9.70"
H (Height)	8.11"
W (Width)	3.04"
D1 (Distance 1)	1.10"
D2 (Distance 2)	2.21"

WEIGHT


Catalog Number	Fixture Weight	Carton Weight
KT-FLED15PS-R4A-UNV-8CSB-VDIM KT-FLED15PS-R4A-UNV-8CSB-VDIM-W	2.31 lbs	2.89 lbs
KT-FLED35PS-R4A-UNV-8CSB-VDIM KT-FLED35PS-R4A-UNV-8CSB-VDIM-W	2.37 lbs	3.26 lbs
KT-FLED60PS-R4A-UNV-8CSB-VDIM KT-FLED60PS-R4A-UNV-8CSB-VDIM-W	2.42 lbs	4.32 lbs

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT

PHYSICAL SPECIFICATIONS (continued)

SLIPFITTER MOUNT

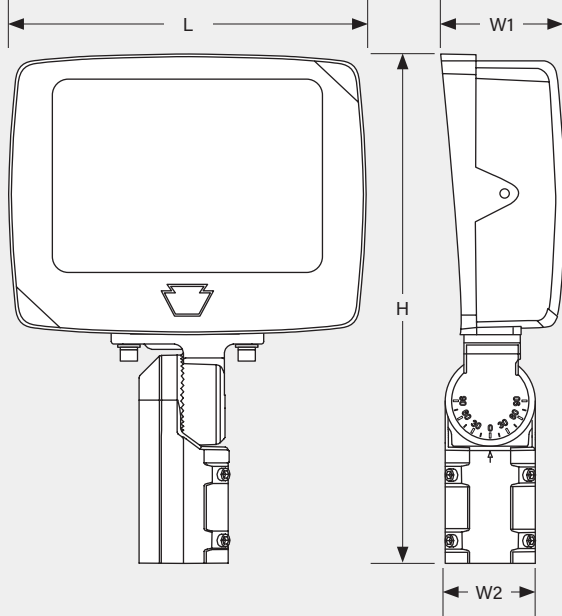

KT-FLED75PS-R4A-UNV-8CSB-VDIM KT-FLED75PS-R4A-UNV-8CSB-VDIM-W

L (Length)	10.53"
H (Height)	14.57"
W1 (Width 1)	3.61"
W2 (Width 2)	2.48"


KT-FLED100PS-R4A-UNV-8CSB-VDIM KT-FLED100PS-R4A-UNV-8CSB-VDIM-W

L (Length)	10.53"
H (Height)	14.57"
W1 (Width 1)	3.61"
W2 (Width 2)	2.48"

WEIGHT

Catalog Number	Fixture Weight	Carton Weight
KT-FLED75PS-R4A-UNV-8CSB-VDIM KT-FLED75PS-R4A-UNV-8CSB-VDIM-W	5.75 lbs	7.28 lbs
KT-FLED100PS-R4A-UNV-8CSB-VDIM KT-FLED100PS-R4A-UNV-8CSB-VDIM-W	6.12 lbs	7.28 lbs

TRUNNION MOUNT

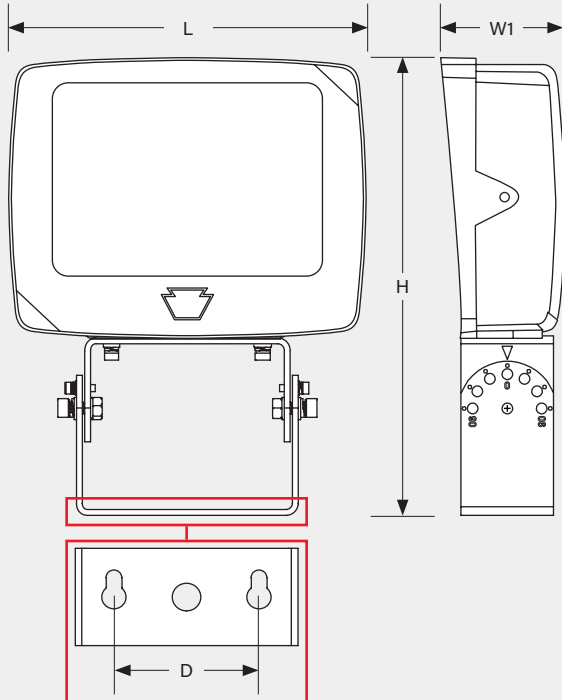

KT-FLED75PS-R4A-UNV-8CSB-VDIM KT-FLED75PS-R4A-UNV-8CSB-VDIM-W

L (Length)	10.53"
H (Height)	12.41"
W1 (Width 1)	3.61"
D (Distance)	2.67"

KT-FLED100PS-R4A-UNV-8CSB-VDIM KT-FLED100PS-R4A-UNV-8CSB-VDIM-W

L (Length)	10.53"
H (Height)	12.41"
W1 (Width 1)	3.61"
D (Distance)	2.67"

WEIGHT

Catalog Number	Fixture Weight	Carton Weight
KT-FLED75PS-R4A-UNV-8CSB-VDIM KT-FLED75PS-R4A-UNV-8CSB-VDIM-W	6.12 lbs	7.28 lbs
KT-FLED100PS-R4A-UNV-8CSB-VDIM KT-FLED100PS-R4A-UNV-8CSB-VDIM-W	6.49 lbs	7.28 lbs

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT

MOUNTING OPTIONS

KNUCKLE MOUNT (Bronze or White)



KT-FLED15PS-R4A-UNV-8CSB-VDIM
KT-FLED15PS-R4A-UNV-8CSB-VDIM-W



KT-FLED35PS-R4A-UNV-8CSB-VDIM
KT-FLED35PS-R4A-UNV-8CSB-VDIM-W



KT-FLED60PS-R4A-UNV-8CSB-VDIM
KT-FLED60PS-R4A-UNV-8CSB-VDIM-W



YOKE MOUNT (Bronze or White)



KT-FLED15PS-R4A-UNV-8CSB-VDIM
KT-FLED15PS-R4A-UNV-8CSB-VDIM-W



KT-FLED35PS-R4A-UNV-8CSB-VDIM
KT-FLED35PS-R4A-UNV-8CSB-VDIM-W



KT-FLED60PS-R4A-UNV-8CSB-VDIM
KT-FLED60PS-R4A-UNV-8CSB-VDIM-W



SLIPFITTER MOUNT (Bronze or White)



KT-FLED75PS-R4A-UNV-8CSB-VDIM
KT-FLED75PS-R4A-UNV-8CSB-VDIM-W



KT-FLED100PS-R4A-UNV-8CSB-VDIM
KT-FLED100PS-R4A-UNV-8CSB-VDIM-W



TRUNNION MOUNT (Bronze or White)



KT-FLED75PS-R4A-UNV-8CSB-VDIM
KT-FLED75PS-R4A-UNV-8CSB-VDIM-W



KT-FLED100PS-R4A-UNV-8CSB-VDIM
KT-FLED100PS-R4A-UNV-8CSB-VDIM-W



KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT

EPA SPECIFICATIONS

FIXTURE HOUSING

- Conditions: Horizontal winds only for calculations.
- Worst case total projected area used for calculations.
- All drag coefficients are set as worst case 1.2.
- For details on exact EPA calculations and assumptions, please contact productsupport@keystonetech.com

EPA CALCULATIONS FOR 15-100W FIXTURES

Fixture Wattage	Mounting Position		
	Vertical	Horizontal	45°
15W	0.25 sq/ft	0.12 sq/ft	0.26 sq/ft
35W	0.34 sq/ft	0.17 sq/ft	0.36 sq/ft
60W	0.42 sq/ft	0.20 sq/ft	0.44 sq/ft
75W	0.62 sq/ft	0.30 sq/ft	0.65 sq/ft
100W	0.62 sq/ft	0.30 sq/ft	0.65 sq/ft

ACCESSORIES

GUARDS/SHIELDS

Field-Installable only (purchased separately)


✓	Suffix*	Catalog number	Description	UPC	Easy Code
	-	KT-FLED-WG-R4-1-KIT	Wire guard Used on 15W series 4 floodlight	843654160412	GZR-05
	-	KT-FLED-WG-R4-2-KIT	Wire guard Used on 35W series 4 floodlight	843654160429	OST-13
	-	KT-FLED-WG-R4-3-KIT	Wire guard Used on 60W series 4 floodlight	843654160436	SYN-26
	-	KT-FLED-WG-R4-4-KIT	Wire guard Used on 75W and 100W series 4 floodlight	843654160443	NSA-47




KT-FLED-WG-R4-1-KIT



KT-FLED-WG-R4-2-KIT



KT-FLED-WG-R4-3-KIT



KT-FLED-WG-R4-4-KIT



KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT

ACCESSORIES (continued)

MOUNTS/BRACKETS

Field-Installable only (purchased separately)

✓	Suffix*	Catalog number	Description	UPC	Easy Code
	-	KT-FLED-SF-1-KIT	Slipfitter Mount Adaptor Used on 15–60W series 4 floodlight Bronze	843654153308	JJS-86
	-	KT-FLED-SF-1-KIT-W	Slipfitter Mount Adaptor Used on 15–60W series 4 floodlight White	843654153582	TZP-68
	-	KT-FLED-KM-1-KIT	Knuckle mount Used on 75–100W series 4 floodlight Bronze	843654146836	JAR-10
	-	KT-FLED-KM-1-KIT-W	Knuckle mount Used on 75–100W series 4 floodlight White	843654160931	BWO-02
	-	KT-FLED-SM-1-KIT	Surface mount/wall mount kit Used on 15–60W series 4 floodlight Bronze	843654129167	HZJ-35
	-	KT-FLED-SM-1-KIT-W	Surface mount/wall mount kit Used on 15–60W series 4 floodlight White	843654140551	JNW-56



KT-FLED-SF-1-KIT



KT-FLED-SF-1-KIT-W



KT-FLED-KM-1-KIT



KT-FLED-KM-1-KIT-W



KT-FLED-SM-1-KIT



KT-FLED-SM-1-KIT-W

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

GENERAL PURPOSE FLOODLIGHT

ORDERING INFORMATION

Catalog Number	UPC	Easy Code	DLC Product ID
KT-FLED15PS-R4A-UNV-8CSB-VDIM	843654159980	XBU-79	S-GC1Y13
KT-FLED15PS-R4A-UNV-8CSB-VDIM/TAA	TBD	TBD	
KT-FLED15PS-R4A-UNV-8CSB-VDIM-W	843654159997	BAU-35	S-GC1Y13
KT-FLED15PS-R4A-UNV-8CSB-VDIM-W/TAA	TBD	TBD	
KT-FLED35PS-R4A-UNV-8CSB-VDIM	843654160009	WAW-25	S-Y02CC6
KT-FLED35PS-R4A-UNV-8CSB-VDIM/TAA	TBD	TBD	
KT-FLED35PS-R4A-UNV-8CSB-VDIM-W	843654160016	VAO-46	S-Y02CC6
KT-FLED35PS-R4A-UNV-8CSB-VDIM-W/TAA	TBD	TBD	
KT-FLED60PS-R4A-UNV-8CSB-VDIM	843654160023	CFQ-95	S-N2BXL
KT-FLED60PS-R4A-UNV-8CSB-VDIM/TAA	TBD	TBD	
KT-FLED60PS-R4A-UNV-8CSB-VDIM-W	843654160030	NJC-32	S-N2BXL
KT-FLED60PS-R4A-UNV-8CSB-VDIM-W/TAA	TBD	TBD	
KT-FLED75PS-R4A-UNV-8CSB-VDIM	843654160047	FKY-33	S-7YVFWN
KT-FLED75PS-R4A-UNV-8CSB-VDIM/TAA	TBD	TBD	
KT-FLED75PS-R4A-UNV-8CSB-VDIM-W	843654160054	XET-23	S-7YVFWN
KT-FLED75PS-R4A-UNV-8CSB-VDIM-W/TAA	TBD	TBD	
KT-FLED100PS-R4A-UNV-8CSB-VDIM	843654160061	WEC-82	S-5FXL3W
KT-FLED100PS-R4A-UNV-8CSB-VDIM/TAA	TBD	TBD	
KT-FLED100PS-R4A-UNV-8CSB-VDIM-W	843654160078	CEF-57	S-5FXL3W
KT-FLED100PS-R4A-UNV-8CSB-VDIM-W/TAA	TBD	TBD	

CATALOG NUMBER BREAKDOWN

KT-FLEDXXPS-R4A-UNV-8CSB-VDIM-X

1 2 3 4 5 6 7 8 9 10 11 12 13 14

- 1 Keystone Technologies
- 2 LED Floodlight Fixture
- 3 Max Wattage
- 4 Power Select
- 5 Rectangular Shape
- 6 Style
- 7 Distribution
- 8 Mounting
- 9 80 CRI
- 10 Color Select
- 11 Color Select Designation
- 12 0-10V Dimming
- 13 Housing Color
- 14 TAA Compliant

3 Wattage

15	15/12/9W
35	35/25/15W
60	60/50/40W
75	75/60/45W
100	100/90/80W

6 Style

4	Series 4
---	----------

7 Distribution

A	Wide (7H x 7V)
---	----------------

8 Mounting

UNV	Universal
-----	-----------

11 Color Select Designation

B	3000/4000/5000K
---	-----------------

13 Housing Color

	Bronze
W	White

14 TAA Compliant

/TAA	Made In Mexico
------	----------------