

SOLID STATE LIGHTING LED RETROFIT LAMPS & FIXTURES





Table of Contents

PAR Series 4-5

Indoor Reflectors 6-7

LED Plug-in 8-9

Mini-Reflectors 10-11

A-Shape & Globe 12-13

Decorative Candelabras 14-15

Linears 16-17

Retrofit Units 18-19

Surface Mount LED Lights 20-21

Post Top Lights 22-23

About Topaz 24-25

Warranty 26-27



PAR Series

A long lasting and energy savings alternative to traditional incandescent lighting. Available in multiple sizes and lumen packages to suit many applications with available color temperatures in 3000K and 5000K. These lamps can save up to 80% of energy and are dimmable for ambiance control and additional energy savings. Rated for indoor and outdoor applications, these lamps are ideal for use in down, track and spot lights in residential, retail, hospitality and commercial applications.



PAR16



PAR20



PAR30

FEATURES

- Smooth side and lighter construction compared to fin type LEDs
- For use in a variety of indoor and outdoor applications*
- Select models available with Energy Star qualification and UL wet location listing
- Dimmable down to 10% of total light output**
- Lasts up to 10X longer than traditional halogen lamps
- New ECO PAR lasts up to 15X longer than traditional halogens
- Advanced optics and thermal management
- Available in 3000K or 5000K
- Contains NO mercury



	Item #	Code	Watts	Volts	Base	Beam Spread	CRI	CCT (Kelvin)	Initial Lumens	CBCP (cd)	Avg. Rated Life	MOL in.	Equiv Wattage	Energy Star	Dimmable
PAR16	LP16/6/830/FL/D	79987	6	120V	E26	38°	82	3000	380	1063	40,000	2.8"	35	Y	Y
	LP16/6/850/FL/D	79988	6	120V	E26	38°	81	5000	360	1100	40,000	2.8"	35	-	Y
PAR20	LP20/8/830/NFL/D	79635	8	120V	E26	25°	80	3000	470	1626	40,000	3.5"	45	Y	Y
	LP20/8/850/NFL/D	79636	8	120V	E26	25°	80	5000	470	1954	25,000	3.5"	45	-	Y
PAR30	LP30/14/830/FL/D	79637	14	120V	E26	40°	80	3000	850	1332	25,000	3.5"	75	Y	Y
	LP30/14/850/FL/D	79638	14	120V	E26	40°	80	5000	850	1656	25,000	3.5"	75	-	Y
PAR30 LONG NECK	LP30L/14/830/FL/D	79639	14	120V	E26	40°	80	3000	850	1648	25,000	4.7"	75	Y	Y
	LP30L/14/850/FL/D	79640	14	120V	E26	40°	80	5000	850	1656	25,000	4.7"	75	-	Y
PAR38 ECO	LP38/14/830/FL/D NEW!	78485	14	120V	E26	40°	80	3000	980	1900	25,000	4.8"	75	-	Y
	LP38/14/850/FL/D NEW!	78486	14	120V	E26	40°	80	5000	1,060	2050	35,000	4.8"	75	-	Y
PAR38	LP38/19/830/FL/D	70638	19	120V	E26	40°	80	3000	1,250	2665	40,000	5.2"	90	Y	Y
	LP38/19/850/FL/D	70639	19	120V	E26	40°	80	5000	1,200	2564	25,000	5.2"	90	-	Y

*Not for use in totally enclosed fixtures

**Compatible with most leading edge or incandescent style dimmers





Indoor Reflectors

Featuring advanced thermal management, optics and chip on board LED technology, the Topaz indoor reflector series provides an efficient high quality LED solution that rivals traditional incandescent lighting. Available in multiple sizes and lumen packages, they are offered in 2700K, 3000K, 4000K and 5000K color temperatures. With energy savings up to 80%, these lamps are dimmable for ambiance control and additional energy savings. Rated for indoor use, applications are ideal for down, track and spot lights in residential, retail, hospitality and commercial environments.



R20

FEATURES

- Approximately 80% energy savings vs 65W BR30
- Select models available with Energy Star qualification
- Dimmable down to 10% of total light output*
- Lasts up to 10X longer than traditional incandescent lamps
- Available in a wide variety of color temperatures
- High CRI option enhances ambiance and colors
- Title 24 compliant model available
- Contains NO mercury
- Damp location rated



	Item #	Code	Watts	Volts	Base	Beam Bpread	CRI	CCT (Kelvin)	Initial Lumens	CBCP (cd)	Avg. Rated Life	MOL In.	Equiv Wattage	Energy Star	Dimmable
R20	LR20/8/827/D	78472	8	120	E26	106°	80	2700	525	160	25,000	3.9"	50	Y	Y
	LR20/7/830/D	NEW! 78548	7	120	E26	106°	80	3000	540	185	25,000	3.9"	50	Y	Y
	LR20/7/840/D	NEW! 78550	7	120	E26	106°	80	4000	560	190	25,000	3.9"	50	Y	Y
	LR20/7/850/D	NEW! 78536	7	120	E26	106°	80	5000	580	200	25,000	3.9"	50	Y	Y
BR30	LBR30/11/827/D	78477	11	120	E26	108°	80	2700	750	260	25,000	5.2"	65	Y	Y
	LBR30/10/927/D	79113	10	120	E26	108°	94	2700	650	220	25,000	5.2"	65	Y	Y
	LBR30/11/830/D	78463	11	120	E26	108°	80	3000	750	260	25,000	5.2"	65	Y	Y
	LBR30/10/840/D	NEW! 79541	10	120	E26	108°	80	4000	800	280	35,000	5.2"	65	Y	Y
	LBR30/10/850/D	NEW! 79542	10	120	E26	108°	80	5000	830	290	25,000	5.2"	65	Y	Y
GU24	LBR30WW/11/GU24/D	78464	11	120	GU24	108°	80	3000	750	260	35,000	4.5"	65	-	Y
BR40	LBR40/13/827/D	78474	13	120	E26	105°	80	2700	850	290	25,000	6.5"	65	Y	Y
	LBR40/13/830/D	78465	13	120	E26	105°	80	3000	880	300	25,000	6.5"	65	Y	Y
	LBR40/12/840/D	NEW! 78587	12	120	E26	103°	80	4000	970	340	25,000	6.5"	75	Y	Y
	LBR40/18/830/D	78466	18	120	E26	106°	80	3000	1,230	460	25,000	6.5"	85	Y	Y
	LBR40/17/850/D	NEW! 78537	17	120	E26	103°	80	5000	1,320	500	25,000	6.5"	90	Y	Y

*Compatible with most leading edge or incandescent style dimmers



LED Plug-in

LED plug-in style replacement lamps for CFL downlights are simple plug and play retrofits offering up to 50% energy savings and 5X longer life expectancy than inefficient pin based CFL lamps. Offering the latest in LED manufacturing, these lamps are designed with advanced thermal management, new generation LED chip technology and 50K hours of operation. Electronic ballast compatible, these lamps are available in horizontal and vertical form factors with no need to bypass an existing ballast. Applications include commercial and residential use for recessed fixtures, sconces and ceiling fixtures.



HORIZONTAL

FEATURES

- Electronic ballast compatible – no need to bypass ballast
- Horizontal and vertical configuration
- Up to 50% energy savings over CFL
- Compatible with G24-q and GX24-q CFL base



VERTICAL



VERTICAL LONG

	Item #		Code	Watts	Volts	Base	Beam Spread	CRI	CCT (Kelvin)	Initial Lumens	Avg. Rated Life	MOL In.	Equiv Wattage
PLT STYLE	LPLT13/830/H	NEW!	79982	13	120-277V	G24-q	120°	83	3000	700	50,000	5.2"	26W
	LPLT13/840/H	NEW!	79983	13	120-277V	G24-q	120°	83	4000	700	50,000	5.2"	26W
	LPLT13/830/V	NEW!	79984	13	120-277V	G24-q	120°	83	3000	900	50,000	3.6"	26W
	LPLT13/840/V	NEW!	79985	13	120-277V	G24-q	120°	83	4000	900	50,000	3.6"	26W
	LPLT13/830/VL	NEW!	79986	13	120-277V	G24-q	120°	83	3000	900	50,000	4.7"	26W
	LPLT13/840/VL	NEW!	79987	13	120-277V	G24-q	120°	83	4000	900	50,000	4.7"	26W



Mini-Reflectors

With its longer usable light hours and low power consumption, Topaz LED mini reflectors are the most efficient alternative to traditional halogen lighting with up to 10X longer life expectancy. Featuring advanced thermal management and optics providing cool operation and uniform light distribution, these lamps are available in a variety of beam distributions and color temperatures to suit your retail, residential, and commercial applications for spot, accent and track lighting.



GBF
REPLACEMENT



R12 1383

FEATURES

- Replacement options for 20W, 35W, 50W halogen MR16's
- Available in a variety of color temperatures for every application
- Can be used on magnetic or electronic transformers
- Select models available with Energy Star qualification
- Lasts up to 10X longer than traditional halogen lamps
- Contains NO mercury



NEW

MR16 GU10



MR11



MR16 6W



MR16 8W DIMMABLE*



	Item #	Code	Watts	Volts	Base	Beam Spread	CRI	CCT (Kelvin)	Initial Lumens	Avg. Rated Life	MOL In.	Equiv Wattage	Dimmable
R12 1383	L1383/3/830/NFL	79630	3	12 VAC/DC	BA15S	30°	80	3000	120	25,000	2.6"	20	-
GBF	LGBF/WW/3/FL	79562	3	12 VAC/DC	BA15D	30°	80	3000	115	25,000	1.8"	20	-
MR11	LM11/4/830/FL	77736	4	12 VAC/DC	GU4	35°	80	3000	200	25,000	1.5"	20	-
	LM11/4/850/FL	77737	4	12 VAC/DC	GU4	35°	80	3000	220	25,000	1.5"	20	-
MR16	LM16WW/4/NFL/C	78354	4	12 VAC/DC	GU5.3	20°	75	3000	180	25,000	2"	20	-
	LM16CW/4/NFL/C	78309	4	12 VAC/DC	GU5.3	20°	75	6000	200	25,000	2"	20	-
	LM16WW/6/FL	78236	6	12 VAC/DC	GU5.3	40°	71	3000	320	25,000	2"	35	-
	LM16CW/6/FL	78235	6	12 VAC/DC	GU5.3	40°	71	6000	400	25,000	2"	35	-
	LM16/8/830/FL/D	79983	8	12 VAC/DC	GU5.3	38°	81	3000	500	25,000	2"	50	Y
	LM16/8/840/FL/D	79985	8	12 VAC/DC	GU5.3	38°	81	4000	450	25,000	2"	50	Y
	LM16/8/850/FL/D	79984	8	12 VAC/DC	GU5.3	38°	81	5000	450	25,000	2"	50	Y
GU10	LGU10/6/830/D** NEW!	78397	6	120 VAC	GU10	40°	82	3000	400	25,000	2"	50	Y
	LGU10/6/860/D** NEW!	78398	6	120 VAC	GU10	40°	82	6000	450	25,000	2"	50	Y

*Compatible with most electronic L/V dimmers and transformers

**Compatible with most leading edge or incandescent style dimmers

A-Shape & Globe

Delivering exceptional long life operation, significant energy savings and aesthetically pleasing warm to neutral colors, Topaz A-shape and globe lamps are the superior alternative to traditional incandescent lighting. Topaz A-shape lamps feature both omni and directional light distribution for direct replacement of 40W through 60W incandescents. Our globe lamp offers excellent light distribution in a decorative package and replaces traditional 40W lamps. Select dimmable models offer complete ambiance control and up to 75% additional energy savings. An ideal replacement for lamps in ceiling fans, down lights, task lighting, and bathroom vanities, our brand is a proven choice for residential, retail, hospitality and commercial applications.



NEW

OMNI-DIRECTIONAL
STYLE



FEATURES

- Familiar shape perfect for household applications
- Approximately 75% energy savings vs 60W incandescent
- Select models are dimmable down to 10% of total light output*
- Lasts up to 10X longer than traditional incandescent lamps
- Select models available with Energy Star qualification
- Available in a number of styles and wattages
- Omni-directional models provide 300° of useful light
- Contains NO mercury



FILAMENT STYLE



OMNI-DIRECTIONAL
STYLE - GU24



GLOBE



ECO STYLE

NEW



	Item #		Code	Watts	Volts	Base	CRI	CCT (Kelvin)	Initial Lumens	Avg. Rated Life	MOL In.	Equiv Wattage	Energy Star	Dimmable
OMNI-DIRECTIONAL STYLE	LA19/7/827/D	NEW!	79642	7	120	E26	80	2700	470	25,000	4.4"	40	Y	Y
	LA19/10/827/GU24/D	NEW!	78552	10	120	GU24	80	2700	800	25,000	4.3"	60	**	Y
	LA19/10/827/D	NEW!	79643	10	120	E26	80	2700	810	25,000	4.6"	60	Y	Y
	LA19/10/830/D	NEW!	79649	10	120	E26	80	3000	820	25,000	4.6"	60	Y	Y
ECO STYLE	LA19/7/827/ECO/D		77752	7	120	E26	80	2700	450	25,000	4.7"	40	-	Y
	LA19/7/830/ECO/D	NEW!	77780	7	120	E26	80	3000	470	25,000	4.7"	40	-	Y
	LA19/7/850/ECO/D	NEW!	77782	7	120	E26	80	5000	510	25,000	4.7"	40	-	Y
	LA19/10/827/ECO/D		77753	10	120	E26	80	2700	800	25,000	4.7"	60	-	Y
	LA19/10/830/ECO/D	NEW!	77784	10	120	E26	80	3000	830	25,000	4.7"	60	-	Y
	LA19/10/850/ECO/D	NEW!	77786	10	120	E26	80	5000	900	25,000	4.7"	60	-	Y
FILAMENT STYLE - A17	LA17/4/827/E26-61		79941	4	120	E26	80	2700	330	10,000	4.3"	40	-	-
GLOBE	LG25/8/827/D-46		79972	8	120	E26	80	2700	420	25,000	4.3"	40	-	-

*Compatible with most leading edge or incandescent style dimmers

**Energy Star pending March 2015

Decorative Candelabras

Available in blunt or flame tip configurations and offered in aesthetically pleasing warm 2700K and 3000K color temperatures, Topaz's decorative LED candelabra lamps are the energy savings alternative to traditional lighting. Select models are dimmable for complete ambiance control and offer additional energy and maintenance savings. This series is a long lasting direct replacement for incandescent lamps in ceiling fans, wall sconces and chandeliers.



DIMMABLE



ECONOMY

FEATURES

- Available in many wattages and configurations for every application
- Warm, pleasing glow
- Lasts up to 10X longer than traditional incandescent lamps
- Perfect for chandeliers, wall sconces, ceiling fans
- Select models dimmable*
- Contains NO mercury



FILAMENT STYLE



LCFF/5



LCTF/5



DIMMABLE LB11/5




	Item #	Code	Watts	Volts	Shape	Base	CRI	CCT (Kelvin)	Initial Lumens	Avg. Rated Life	MOL In.	Equiv Wattage	Dimmable
DIMMABLE	LCFC/WW/3.5/D	79622	3.5	120V	B12 Flame Tip	E12	80	3000	250	30,000	4.7"	40	Y
	LCTC/WW/3.5/D	79624	3.5	120V	B12 Blunt Tip	E12	80	3000	250	30,000	4.1"	40	Y
	LB11/5/830/E12/D	79856	4.9	120V	B11 Blunt Tip	E12**	82	3000	315	25,000	4.2"	40	Y
	LCFF/5/830/F/D NEW!	79841	5	120V	C11 Flame Tip	E12**	80	3000	350	25,000	4.8"	40	Y
	LCTF/5/830/F/D NEW!	79843	5	120V	B11 Blunt Tip	E12**	80	3000	350	25,000	4.2"	40	Y
ECONOMY	LB10WW/2/C/E12	77555	2	120V	B10 Blunt Tip	E12	74	3000	100	15,000	3.8"	15	-
	LB10WW/2/C/E26	77561	2	120V	B10 Blunt Tip	E26	74	3000	100	15,000	3.8"	15	-
FILAMENT STYLE	LB11/2/827/E12	79942	2	120V	B11 Blunt Tip	E12	80	2700	170	10,000	3.8"	25	-
	LB11/2/827/E26	79943	2	120V	B11 Blunt Tip	E26	80	2700	170	10,000	3.8"	25	-
	LB11L/2/827/E12	79944	2	120V	B11 Long	E12	80	2700	170	10,000	4.5"	25	-

*Compatible with most leading edge or incandescent style dimmers

**E26 Adapter Included

Linears

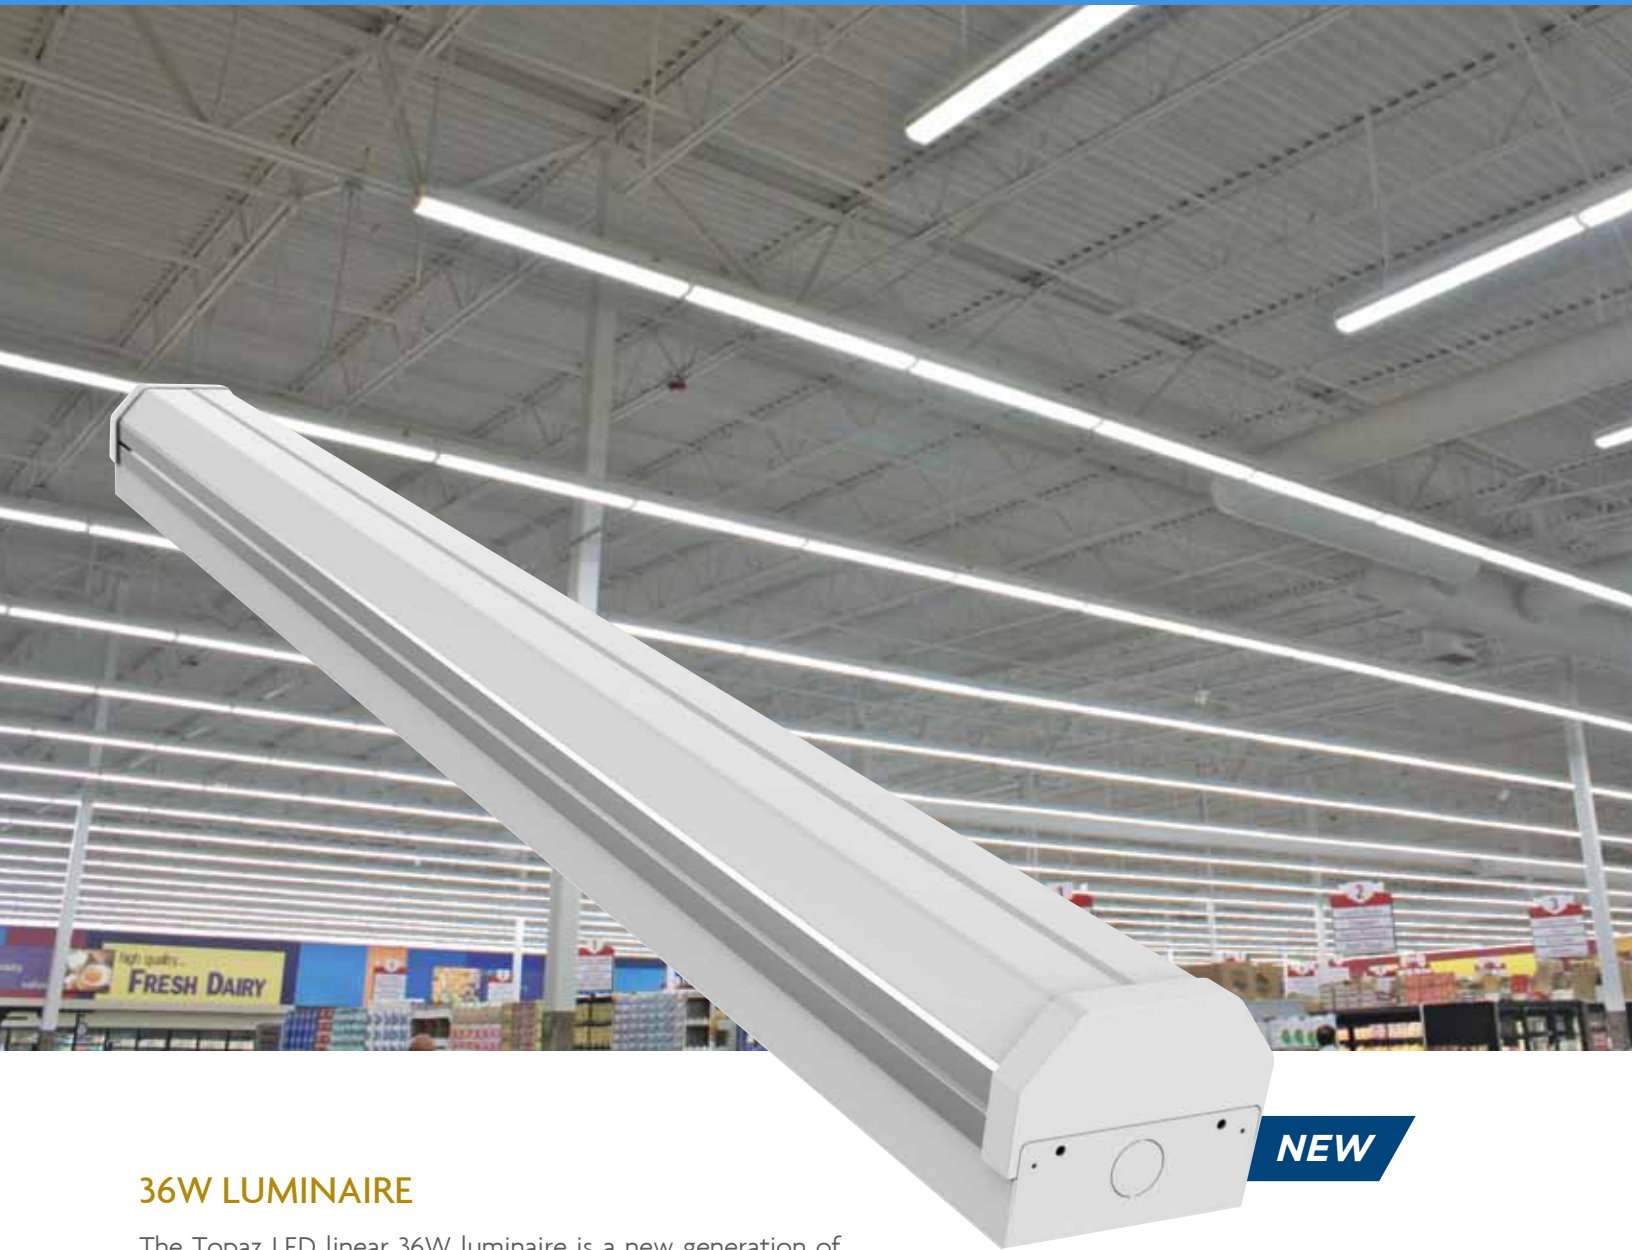

36W LUMINAIRE

The Topaz LED linear 36W luminaire is a new generation of eco-friendly LED linear lights. With 4,400 lumens achieving 120 lumens per watt, this lamp offers exceptional light output, illumination and energy savings. Ideally suited for commercial applications including offices, classrooms, garages, hallways, health care and storage facilities it can easily be surface mounted or suspended providing additional savings in time and labor costs. Listed/certified with UL, DLC, FCC, NSF, it is rated for 50,000 hours and provides virtually maintenance-free service. Standard 0-10V dimming capability and warranted for an industry leading 5 years.

FEATURES

- Compact and stylish design
- High efficiency 120 lumens/watt
- >80 CRI
- UL, DLC, FCC, NSF
- Surface or suspended mount
- 0-10V dimmable
- Universal voltage (100-277V)





T8 LED TUBES

Offering multiple configurations, Topaz LED tubes are engineered for ease of replacement with up to 2X longer life expectancy than traditional fluorescent lamps. Making the switch to LED tubes will result in saving up to 35% in energy costs with additional savings in maintenance and installation fees. Our LED tubes are available in neutral to cool white color temperatures with select models DLC certified.



Clear and Frosted Ballast Bypass

Designed and engineered for replacement or retrofit of commercial fluorescent lamp applications, Topaz LED T8 clear and frosted, ballast bypass tubes are available with an internal power supply for 120-277V retrofit applications.

Frosted Ballast Direct

New to the lineup are our next generation frosted, ballast direct tubes. Offering the most advanced lighting solution with a highly diffused glass tube, internal power supply and heatsink for glare free and even light distribution, our ballast compatible LED tubes are available for quick conversion and operate with most normal, low or high factor ballasts.

FEATURES

- Lasts twice as long as standard fluorescent lamps
- 2', 3' and 4' lengths
- Available in a variety of color temperatures
- Select models available with DLC certification
- Safe, easy replacement for T8 lamp & ballast systems
- Contains NO mercury
- -25°C to 45°C operating temperature range

	Item #	Code	Watts	Volts	Base	CRI	CCT (Kelvin)	Initial Lumens	Beam Spread	Avg. Rated Life	MOL In.	DLC Approved	Dimmable
T8 CLEAR BALLAST BYPASS	L2T8/40/11/U/G2	79570	11	100-277VAC	G13	82	4000	1,000	120°	35,000	24"	-	-
	L2T8/50/11/U/G2	79572	11	100-277VAC	G13	82	5000	1,100	120°	35,000	24"	-	-
	L3T8/40/15/U/G2	79576	15	100-277VAC	G13	82	4000	1,600	120°	35,000	36"	-	-
	L3T8/50/15/U/G2	79577	15	100-277VAC	G13	82	5000	1,600	120°	35,000	36"	-	-
	L4T8/35/20/U/G2	79240	20	100-277VAC	G13	82	3500	1,900	120°	35,000	48"	-	-
	L4T8/40/20/U/G3	70657	20	100-277VAC	G13	82	4000	2,100	120°	50,000	48"	DLC	-
	L4T8/50/20/U/G3	70658	20	100-277VAC	G13	82	5000	2,100	120°	50,000	48"	DLC	-
	L4T8/65/20/U/G3	79248	20	100-277VAC	G13	82	6500	2,200	120°	50,000	48"	-	-
T8 FROSTED BALLAST BYPASS	L2T8B/840/9/U/F	NEW! 77941	9	120-277V	G13	80	4000	1,000	240°	50,000	24"	DLC	-
	L2T8B/850/9/U/F	NEW! 77942	9	120-277V	G13	80	5000	1,000	240°	50,000	24"	DLC	-
	L4T8B/840/18/U/F	NEW! 77945	18	120-277V	G13	80	4000	1,800	240°	50,000	48"	DLC	-
	L4T8B/850/18/U/F	NEW! 77946	18	120-277V	G13	80	5000	1,800	240°	50,000	48"	DLC	-
	L4T8B/865/18/U/F	NEW! 77950	18	120-277V	G13	80	6500	1,800	240°	50,000	48"	-	-
FROSTED BALLAST DIRECT	L4T8E/840/18/U/F	NEW! 77947	18	Ballast Connect	G13	80	4000	1,800	240°	50,000	48"	DLC	-
	L4T8E/850/18/U/F	NEW! 77948	18	Ballast Connect	G13	80	5000	1,800	240°	50,000	48"	DLC	-
36W LUMINAIRE	F-LED/4/36W/40/D	NEW! 79858	36	100-277V	-	>80	4000	4,300	270°	50,000	47.3"	DLC	Y



Retrofit Units

High performance and easy to install retrofit solutions for standard recessed housings. Available in 4" and 6" for down lighting or directional lighting applications and dimmable down to 10% for light level control. Offering 90+ (CRI) for exceptional color rendering in both 3000K and 4000K.

Die-cast constructed with advanced thermal management and optics, each unit is equipped with a power connector system for ease of installation. All units are energy star approved and UL rated for wet locations. Topaz LED Retrofit Units are designed for reduced cost of ownership through lower energy and maintenance costs and have a life rating up to 50K hours.




SQUARE AND GIMBAL

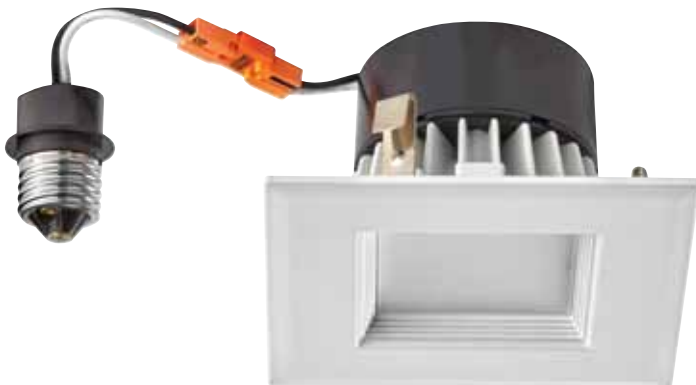

FEATURES

- Direct retrofit for existing trim/bulb combinations
- Easy installation: unit screws into socket
- Dimmable down to 10% of total light output*
- Available in different sizes and color temperatures for every application
- Select models adjustable 20° +/-
- Energy Star qualified
- Contains NO mercury



If used with available
GU24 adapter



RATED FOR
WET LOCATIONS

	Item #	Code	Size	Watts	CCT (Kelvin)	CRI	Initial Lumens	Avg. Rated Life	Energy Star	Dimmable
GIMBAL	RTL/437WH/90/D	NEW! 79707	4"	8	3000	94	620	50,000	Y	Y
	RTL/447WH/90/D	NEW! 79709	4"	8	4000	95	665	50,000	Y	Y
	RTL/637WH/90/D	NEW! 79711	6"	12	3000	95	1,025	50,000	Y	Y
	RTL/647WH/90/D	NEW! 79713	6"	12	4000	95	1,100	50,000	Y	Y
SQUARE	RTL/43SQ/WH/90/D	NEW! 79715	4"	10	3000	95	715	50,000	Y	Y
	RTL/44SQ/WH/90/D	NEW! 79717	4"	10	4000	95	760	50,000	Y	Y
BAFFLE	RTL/433WH/90/D	NEW! 79719	4"	11	3000	90	750	50,000	Y	Y
	RTL/443WH/90/D	NEW! 79721	4"	11	4000	90	765	50,000	Y	Y
	RTL/RF/443WH/WH/D	70971	4"	11	4000	82	725	35,000	Y	Y
	RTL/RF/633WH/ECO/D	70982	5/6"	11	3000	83	750	36,000	Y	Y
	RTL/643WH/90/D	NEW! 79725	5/6"	15	4000	90	1,250	50,000	Y	Y
	RTL/633WH/90/D	NEW! 79723	5/6"	16	3000	90	1,155	50,000	Y	Y
	RTL/RF/643WH/WH/D	70973	5/6"	16	4000	82	1,248	40,000	Y	Y
CANS FOR USE WITH ALL RETROFIT KITS	RH4/NLED/IC/AT	79990	4"	IC/AT - NEW CONSTRUCTION						
	RH4/RLED/IC/AT	79991	4"	IC/AT - REMODEL						
	RH5/NLED/IC/AT	79996	5"	IC/AT - NEW CONSTRUCTION						
	RH5/RLED/IC/AT	79997	5"	IC/AT - REMODEL						
	RH6/NLED/IC/AT	79992	6"	IC/AT - NEW CONSTRUCTION						
	RH6/RLED/IC/AT	79993	6"	IC/AT - REMODEL						



Optional GU24 Socket Adapter:
Item # RTLED/RETRO/GU24
Code: 79560

*Compatible with most leading edge or incandescent style dimmers

Surface Mount LED Lights

An easy to install down light solution for new construction as well as retrofit applications, Topaz surface mount LEDs are offered in standard 4" or 6" sizes and are designed to be fitted in standard 4" J-boxes. Perfect for residential or commercial applications including bathrooms, closets, storage areas, hallways and living areas, they offer exceptional color rendering of 90+ CRI and are available in 3000K and 4000K color temperatures. Dimmable down to 10% with standard incandescent or LED style leading edge dimmers, their optical design provides a wide beam greater than 105° with low glare. The SDL4 (4W) is rated for 36K hours and the SDL6 (15W) is rated for 47K hours of operation, greatly reducing cost of ownership through reduced maintenance and lower utility costs. California Title 24 and Energy Star listed, these fixtures are wet location rated for shower or outdoor protected enclosures.



4" DIMMABLE DISK LIGHT

NEW



FEATURES

- Surface mount to most 4" J-boxes
- Driver-On-Board technology eliminates an external power supply
- Power Factor >.99
- Dimmable* down to 10%
- Life rating >36K hours (L70)
- Suitable for damp or wet locations for shower or outdoor enclosed locations
- Wide beam angle >105°
- Color temperature: 3000K and 4000K
- CRI >90 for exceptional color appearance
- Up to 75% Energy saving over traditional incandescent sources
- Mercury free, RoHS and No UV

6" DIMMABLE DISK LIGHT



NEW



RATED FOR
WET LOCATIONS

	Item #	Code	Watts	Volts	CRI	CCT (Kelvin)	Initial Lumens	CBCP (cd)	Avg. Rated Life	Energy Star	Dimmable
CEILING & CLOSET LED LIGHTS	SDL4/12/930/D NEW!	76402	13.5	120V	90	3000	630	223	36,000	Y	Y
	SDL4/12/940/D NEW!	76403	13.5	120V	90	4000	630	223	36,000	Y	Y
	SDL6/15/930/D NEW!	76404	15	120V	90	3000	975	342	47,000	Y	Y
	SDL6/15/940/D NEW!	76405	15	120V	90	4000	975	342	47,000	Y	Y

Post Top Lights

An easy to install and energy efficient solution for acorn, globe or bollard HID replacements, Topaz post top lights are an advanced alternative to traditional lighting. Featuring the latest technology in thermal management, optics and LEDs, they are designed to the highest standard and offer maximum efficiency while providing the uppermost quality of light. Suitable for both outdoor and indoor applications, they offer improved quality of light compared to high pressure sodium and metal halide light sources and greatly reduce the cost of ownership through minimal maintenance, lower utility costs and disposal issues.



8" - 27W

NEW



9.2" - 36W

NEW

FEATURES

- Life rating 40K hours (L70)
- Universal voltage 120-277VAC
- Base up or base down application
- Suitable for use in enclosed fixtures
- 360° optical design
- Up to 75% energy saving over traditional HID sources
- Mercury free, RoHS and UV free
- E26 base (E39 with adapter)



10.4" - 45W & 54W

NEW



11.4" - 75W

NEW

	Item #	Code	Watts	Volts	Base	CRI	CCT (Kelvin)	Initial Lumens	Avg. Rated Life (L70)	MOL In.	Equiv Wattage
POST TOP LIGHTS	LPT27/850/INT	NEW! 77936	27	120-277V	E26 MED*	80	5000	2,900	40,000	8"	100W HPS
	LPT36/850/INT	NEW! 77937	36	120-277V	E26 MED*	80	5000	3,800	40,000	9.2"	175W MH
	LPT45/850/INT	NEW! 77938	45	120-277V	E26 MED*	80	5000	4,500	40,000	10.4"	200W MH
	LPT54/850/INT	NEW! 77939	54	120-277V	E26 MED*	80	5000	5,600	40,000	10.4"	250W MH
	LPT75/850/INT/E39	NEW! 78689	75	120-277V	E39 MOG	80	5000	7,875	40,000	11.4"	320W MH

*E39 adapter sold separately

About Topaz

With 30 years of experience in the lighting industry, Topaz has always been your go-to supplier for all traditional lamps and lighting products. As the shape of the lighting industry continues to evolve, Topaz is committed to staying ahead of the technological power curve. To that end, we are proud to showcase our complete line of LED products in this catalog.

Our friendly, and knowledgeable sales team is standing by to answer your call and to help you find the items you need, at the price you demand. Contact your Topaz lighting sales representative today for more information on our complete and ever-expanding line of LED products.



NY OFFICE

925 Waverly Avenue
Holtsville, NY 11742
800.666.2852
Fax | 631.758.8026

FL OFFICE

2020 West 26th Street
Jacksonville, FL 32209
800.338.2852
Fax | 772.778.5386

CA OFFICE

225 Parkside Drive
San Fernando, CA 91340
888.551.2852
Fax | 818.838.3102

www.topaz-usa.com



Topaz LED Lamp Limited Warranty

Topaz Lighting Corp. (hereinafter called "Topaz"), 925 Waverly Avenue, Holtsville, NY 11742, warrants to the purchaser that Topaz lamps will be free from defect in material and or workmanship from the date of purchase for the following time periods:

Lamp Category	Warranty*
PAR:	5 Years
Indoor Reflector:	5 Years
Mini-Reflector:	5 Years
A-Shape:	5 Years
Globe:	5 Years
Linear:	5 Years
Retrofit Unit:	5 Years
Surface Mount Light:	5 Years
Post Top Light:	5 Years

All other lamps are covered under our Quality Policy.

FIVE (5) YEAR LIMITED WARRANTY: TOPAZ LIGHTING CORP. warrants to the original purchaser that all TOPAZ CXL LED lamps shall be free from defects of material and workmanship for a period of five (5) years from the date of purchase. TOPAZ LIGHTING CORP. will, at its option, repair or replace without charge a defective LED lamp that has not been misused, carelessly handled or improperly installed. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other incidental or consequential charges. www.topaz-usa.com.

*Based on maximum operating hours @ 12 hours/day.

This warranty is not applicable to any lamp, which is not installed and operated in accordance with the current edition of the National Electric Code (NEC), the Standards for Safety of Underwriters Laboratory, Inc. (UL), the Standards for the American National Standards Institute (ANSI) and with Topaz instructions and guidelines for the lamp. This warranty is not applicable to any lamp subjected to abnormal stresses and operating conditions. Use of occupancy sensors, dimmers or programmable systems with some lamp types may void the warranty.

Topaz reserves the right to examine all lamps prior to the determination of warranty status. All lamps must be retained for warranty claims. The warranty period starts on the date of installation. If the date of installation cannot be determined or is unknown, the warranty period will start with the date of the original purchase from Topaz.

Warranty Exclusion Clause for Products Exported:

This warranty shall be void for products that are exported outside the U.S. and its territories. The distributor, private labeler or OEM assumes all responsibility imposed by statute, regulation or law on product sold into those markets.

NO IMPLIED STATUTORY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE SHALL APPLY BEYOND THE AFOREMENTIONED WARRANTY PERIOD.

The foregoing warranty is exclusive of all other statutory, written or oral warranties, and no other warranties of any kind, statutory or otherwise, are given or herein expressed. The warranty sets forth Topaz's responsibilities regarding the lamp and claimant's exclusive remedy.

LIMITATION OF LIABILITY. Topaz will not under any circumstances, whether as a result of breach of contract, breach of warranty, tort, strict liability or otherwise, be liable for consequential, incidental, special or exemplary damages including, but not limited to, loss of profits or revenues, loss of use of lamp or any other goods or associated equipment or damage to any associated equipment, cost of capital, cost of substitute products, facilities of service, down time cost, or claims of claimant's customers. Topaz's liability on any claim of any kind for any loss or damages arising out of, resulting from or concerning any aspect of this agreement from the products or services furnished hereunder shall not exceed the price of the specific lamp or lamps which gives rise to the claim. Some states do not allow the exclusion or limitation of damages or the length of time for an implied warranty. Therefore, the limitations or exclusions of consequential or incidental damages and implied warranties may not apply to certain claimants. This warranty gives the claimant specific legal rights. The claimant may also have other rights, which vary from state to state.



Topaz is committed to providing excellent service and high quality products that fully meet and exceed established requirements. We will achieve this through the process of defining, understanding, as well as agreeing and conforming to customer requirements. Topaz proudly stands behind its motto "Friendly Service ... Powerful Solutions."



2015 Topaz Lighting Corp. All rights reserved.

All sizes and specifications are subject to change.



www.Topaz-USA.com

800.666.2852