

SY920

SY920 Low Profile Wraparound utilizes a shallow 3 1/4" housing. Self-spacing unit is suitable for low-density cellulose fiberboard ceilings.

HOUSING Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Standard white ends are injection molded. Knockouts provided.

REFLECTOR Clear DR acrylic prismatic lens; smooth white also available. Lens hinges from either side.

ELECTRICAL Fully wired Universal 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified.

MOUNTING Ceiling surface mount individual or continuous row (with CR bands). Only one CR band supplied with every tandem unit. For continuous row mounting, additional CR bands are needed. Tandem two-lamp model available. Use stabilizer bracket kit for four-lamp pendant hung models.

LISTINGS C-UL-US Listed damp location.


WARRANTY 1 year limited warranty.

Project

Catalog Number

Type

Date



SY920 Low Profile Wraparound Configuration

SERIES	# LAMPS	LAMPS*	OPTIONS	BALLAST	SWITCHING	VOLTAGE
SY920 = Prismatic lens (standard)	2	14 = 14W 24" T5	SR = Specular Reflector	B5 = Electronic T12	<i>For 2 lamp units:</i>	UNV = 120-277V
	3	17 = 17W 24" T8	ELS1 = Emergency Lighting (T8 500 lm, T5 700 lm)	B11 = Electronic T8	Blank = One 2-lamp ballast	120 = 120V
SW920 = Smooth white lens	4	20 = 20W 24" T12	ELS2 = Emergency Lighting (T8 700 lm, T5 700 lm)	B11HP(x) = HP T8*	2/1L = Two 1-lamp ballasts	277 = 277V
		24 = 24W 24" T5HO	ELS3 = Emergency Lighting (T8 1400 lm, T5 1400 lm)	BRES11 = T8**	<i>For 3 & 4 lamp units:</i>	
	22 = Tandem, 4 lamps	28 = 28W 48" T5		B12 = Electronic T12	Blank = (1) 1-lamp ballast and (1) 2-lamp ballast	
		32 = 32W 48" T8		B22 = LFP T8/T12***	3L = (1) 3-lamp ballast	
		40 = 34 or 40W 48" T12		CS = Customer Supplied	4L = (1) 2-lamp and (1) 4-lamp ballast	
		54 = 54W 48" T5HO		B9 = Customer Specified		

*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

**For 2 and 4 lamp 32W Energy Star fixtures



***Fixtures with B22 are UL only

ACCESSORIES


CR = Continuous row mounting band

STBK = Stabilizer Bracket Kit


Dimensions

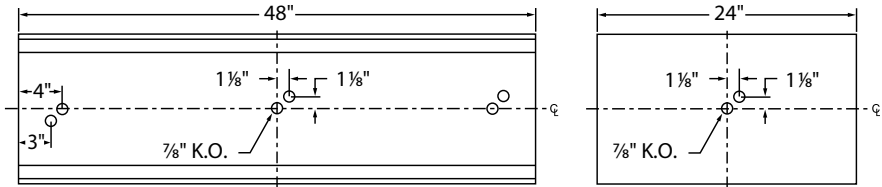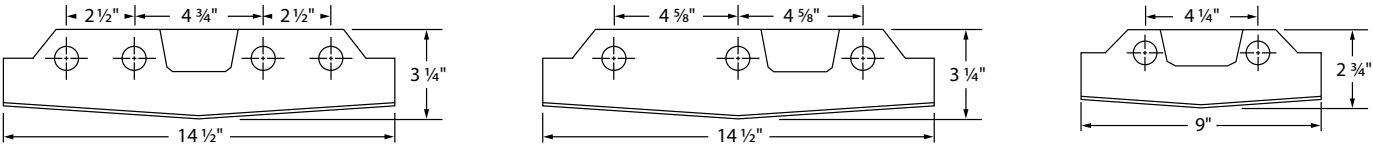

4 Lamp Models

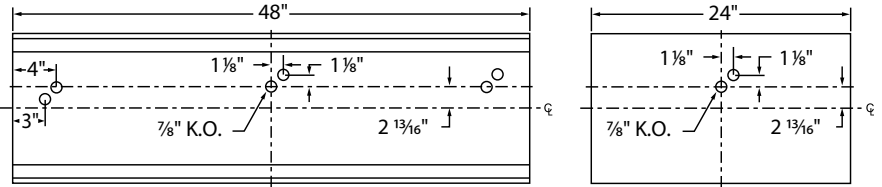

3 Lamp Models

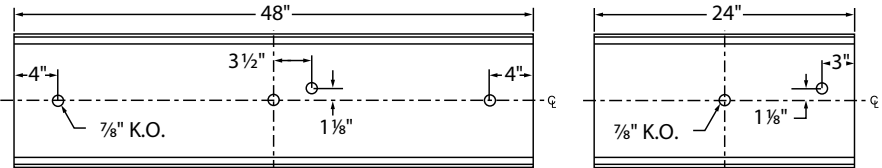

2 Lamp Models

