




MORRIS CAT#: 72639
8" NEW CONSTRUCTION DOWNLIGHT
CCT AND WATTAGE TUNABLE
120-277V, 3K-5K, 12W/20W/30W


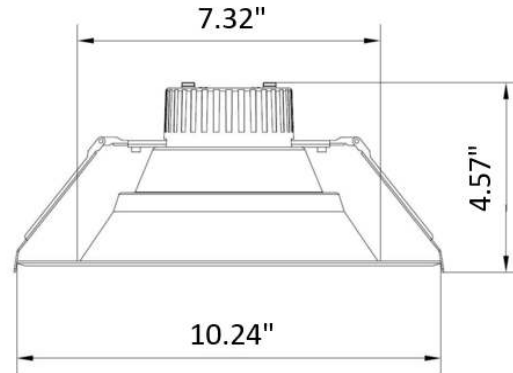


Features:

- Aluminum Housing/Trim - Paintable
- Guaranteed Single Bin Color Consistency - Enhanced Illumination Uniformity
- Torsion Spring Brackets for Recessed Mounting to Sheetrock - Clamps to top of Sheetrock
- Wattage Tunable
- Built in Color / Wattage Tuning Switch
- IC (Insulation Contact) Rated
- Energy Star and cETLus Listed
- IP44 Damp Location Rated
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current	Lumens / Watt	Energy Star
72639	White	12W	2,100	3000K	120-277V	.10A	175	Yes
72639	White	20W	2,250	4000K	120-277V	.17A	112.5	Yes
72639	White	30W	2,400	5000K	120-277V	.25A	80	Yes

Photometrics:

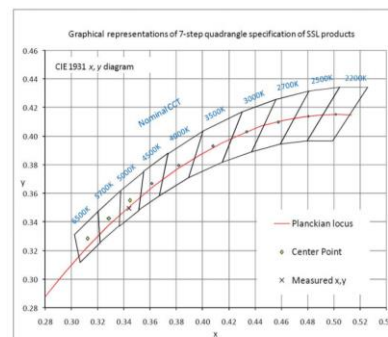

www.morrisproducts.com

1-888-777-6678



MORRIS CAT#: 72639
8" NEW CONSTRUCTION DOWNLIGHT
CCT AND WATTAGE TUNABLE
120-277V, 3K-5K, 12W/20W/30W

Technical Specifications:

Electrical:

Input Voltage: 120-277V
Current: 0.23A
Frequency: 50-60Hz
Power Factor: >0.9

Product Parameters:

Wattage: 12W/20W/30W
Efficacy: 85 lm/ watt
50,000+ LED Life Span
CCT: 3K-5K

Chromaticity Measurements:

Beam Angle: 97.5°
CRI: 94.6
R9: 68

Component Specifications:

LED: SMD2835
Driver: 120-277V
50-60HZ
Driver Output Volts: 30V DC
Driver Output Amps: 780mA
Surge Protection: 1.0 KV

Dimming: N/A

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing/Trim - White Finish
IP Rating: IP44 Indoor Wet Location Rated
Lens Material: Frosted Polycarbonate Lens
Mounting: Ceiling Mount (Drywall / Sheetrock)
Listings: cETLus, Energy Star
Carton Qty: 12
Weight: 1.7 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).